



MAGNETIC FILTER

Filter type	: AFM-10B PLUS
Max. magnetic induction	: 12,000 Gauss
Filter volume	: 120 ml
Maximum temperature	: 120 °C
Maximum pressure	: 12 bars
Maximum flow 1Kpa (l/m)	: 15l
Maximum absorption capacity	: 155 g
Magnet diameter	: 14.5 mm
Mass	: 596 g (without valves)



Product Code
BO-MAG-2



MAGNETIC FILTER

Filter type	: Suitable for Heat Pump
Max. magnetic induction	: 12,000 gauss
Filter Volume	: 530 ml
Max. temperature	: 120°C
Max. Pressure	: 12 bar
Maximum flow 1Kpa (l/m)	: 15l
Maximum absorption capacity	: 155 g
Magnet diameter	: 14.5 mm
Mass	: 596 g (without valves)



Product Code
BO-MAG-1



VACUUM DEGASSERS

System Voltage	: 220 , 230 V $\pm$ 10% / 50 Hz
Connection Sizes	: 1/2" , 3/41
Operating Temp.	: 0 - 90 °C
Range Ambient Temp.	: 0 -40 °C
Range Feature	: Standby Mode




Product Code
VIRA-DEG



AUTOMATIC AIR VENTS

Body	: Brass / Nickel Coated
Float	: PP - Polypropylene
Max. Work. Temp.	: 110 °C
Max. Work Pressure	: 10 Bar

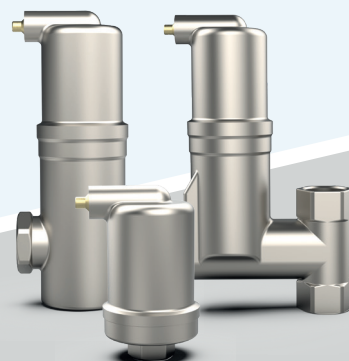


Product Code
SV-D



DIRT SEPARATORS

Body	: Brass / Nickel Coated
Float	: PP - Polypropylene
Max. Work. Temp.	: 110 °C
Max. Work Pressure	: 10 Bar



Product Code
SD-D



MAGNETIC DIRT SEPARATORS

Body Magnet	: PA
Magnet	: Neodymium
Magnet Power	: 9.000 Gauss



Product Code
SD-Y-M / SD-D-M



DEAERATOR / AIR SEPARATOR

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. work. Temp. : 110 °C
 Max. Work. Pressure. : 10 Bar



Product Code
 SV



DIRT SEPARATORS

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. work. Temp. : 110 °C
 Max. Work. Pressure. : 10 Bar



Product Code
 SD



MAGNETIC DIRT SEPARATOR

Size : Carbon Steel - ST37
 Body : DN 50 - 600
 Max. work. Temp. : 110 °C
 Max. Work. Pressure. : 10 Bar



Product Code
 SD-M



DEMOUNTABLE DIRT SEPARATOR

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar



Product Code
 SD-T



DEMOUNTABLE AIR AND DIRT SEPARATORS

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar



Product Code
 SC-T



AIR AND DIRT SEPARATOR

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar



Product Code
 SC



HYDRAULIC SEPARATOR

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar



Product Code
 SCX



MAGNETIC AIR & DIRT SEPARATOR

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar
 Magner Power : 11.000 Gauss



Product Code
 SC-M



MAGNETIC DEAERATOR, DIRT AND HYDRAULIC SEPARATOR

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar
 Magnet Power : 11.000 Gauss



Product Code
 SCX-M



MAGNETIC DEAERATOR, DIRT AND HYDRAULIC SEPARATOR

Body : Carbon Steel - ST37
 Size : 1" - 2"
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar
 Magnet Power : 11.000 Gauss




Product Code
 SCX-D-M



HYDRAULIC BALANCING TANK

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar

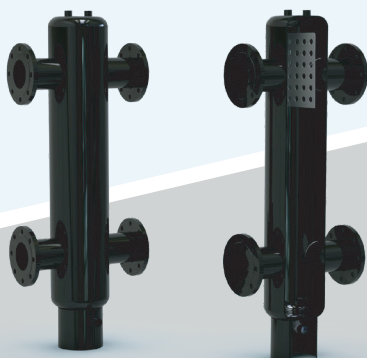


Product Code
 SB



VIRAJAC - INSULATION JACKET

Touch Temperature (Exterior) of jackets : < 45 °C
 Classification Temperature : 260 °C
 Working Temperature : 230 °C
 Density : 140 kg/m3
 Color : Gray

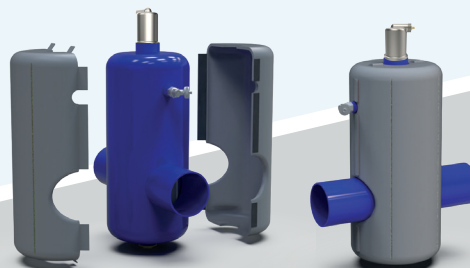

Product Code
 VIRAJAC



VERTICLE SEPARATOR

Body : Carbon Steel - ST37
 Size : DN 50 -600
 Max. Work. Temp : 110 °C
 Max. Work. Pressure : 10 Bar



Designed For
VERTICLE LINES



CHEMICAL DOSING POTS

Vessel : Stainless Steel
 Tundish : Stainless Steel
 Size : 5l , 50l
 Max. Working Pressure : 10 Bar
 Max. Temperature : 90 °C
 Hydraulic Testing Pressure : 16 Bar




Product Code
VDK



V-FORCE-Y MAGNETIC SEPARATOR

Maximum working pressure : 10 Bar
 Maximum working temperature : 100 °C
 Magnet : Neodymium
 Product side seal : EPDM

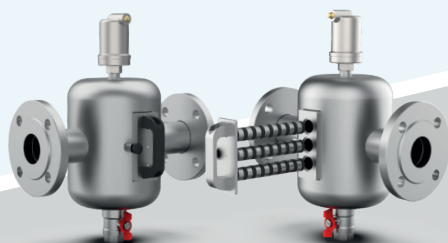

Product Code
V-FORCE-Y



V-FORCE-D MAGNETIC SEPARATOR

Maximum Working pressure : 10 Bar
 Maximum working temperature : 100 °C
 Product side seal : EPDM
 Magnet : Neodymium



Product Code
V-FORCE-D



MANIFOLDS

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp. : 110 °C
 Max. Work Pressure : 10-16-25 Bar



Product Code
 VMAN



MANIFOLDS

Body : Carbon Steel - ST37
 Size : DN 50 - 600
 Max. Work. Temp. : 110 °C
 Max. Work Pressure : 10-16-25 Bar



Product Code
 VMAN



THREADED STAINLESS STEEL MANIFOLDS

Working pressure : 20 bar
 Threaded : 1 1/4"-4
 Flanged : 2"-10"



Product Code
 MANIFOLDS



EXPANSION TANK

Capacity : Up To 5000LT.
 Pressure : 10/16/25 Bar



Product Code
 VEXT



BUFFER TANK

Maximum working pressure of buffer tank	: 3 Bar
Maximum working pressure of the coil	: 16 Bar
Buffer tank maximum operating temperature	: 95 °C
Coil maximum operating temperature	: 110 °C



Product Code
BUFFER TANK



TANGENTIAL AIR SEPARATORS

Flow	: 700 GPM
Pipe	: 8"
Velocity	: 4.5 FPS
Maximum pressure drop	: 2 FT.
Flow	: 230 GPM
Pipe	: 4"
Velocity	: 5.8 FPS
Maximum pressure drop	: 2 FT.




Product Code
TANGENTIAL



WALL MOUNTING ACCESSORIES

Body	: Carbon Steel / Stainless Steel
Connection	: Threaded
Accessories	: Available
Pressure Class	: PN 10-16-25-32
Max. Work. Temp.	: 110 °C
Color	: Blue-Red





Product Code
DAP-5



AXIAL EXPANSION JOINTS

Body	: Stainless Steel
Connection Type	: Floating Flanged / Fixed Flanged
Pressure Class	: 16 Bar / 2,5 Bar (63 Bar Optional)
Temperature	: -80 °C / 427 °C
Expansion	: 30mm (-20 + 10) / 60mm (-40 + 20)




Product Code
KM-D



BRAIDED EXPANSION JOINTS

Body	: Stainless Steel
Connection Type	: Flanged, Welded Ended
Pressure Class	: 16 Bar / 2,5 Bar (63 Bar Optional)
Temperature	: -80 °C / 427 °C
Expansion	: 30mm (-20 + 10) / 60mm (-40 + 20)



Product Code
KM-K



VIBRATION ABSORBER EXPANSION JOINTS

Body	: Stainless Steel , Carbon Steel
Connection Type	: Fixed Flanged
Pressure Class	: 16 Bar / 2,5 Bar (63 Bar Optional)
Temperature	: -80 °C / 427 °C
Expansion	: 30mm (-20 + 10) / 60mm (-40 + 20)




Product Code
KM-TY



DILATATION EXPANSION JOINTS WITH LIMIT RODS

Body	: Stainless Steel , Carbon Steel
Connection Type	: Fixed and Floating Flanged
Pressure Class	: 16 Bar / 2,5 Bar (63 Bar Optional)
Temperature	: -80 °C / 427 °C
Expansion	: Y:±25mm/±50mm/±75mm/±100mm

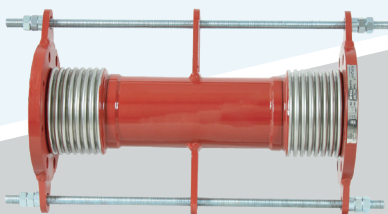


Product Code
KML-D-F



EARTHQUAKE EXPANSION JOINT

Body	: Stainless Steel , Carbon Steel
Connection Type	: Floating Flanged
Pressure Class	: 16 Bar /Max. (40 Bar Optional)
Temperature	: -80 °C / 427 °C
Expansion	: Y:±50mm/±100mm/±150mm/±200mm

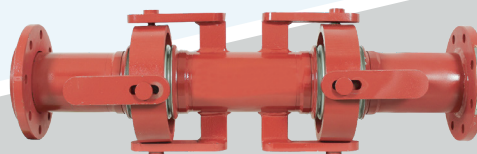

Product Code
KM-MD-F



EXTERNALLY PRESSURIZED EXPANSION

Body	: Stainless Steel , Carbon Steel
Connection Type	: Floating Flanged / Threaded
Pressure Class	: 16 Bar / 64 bar Optional
Temperature	: -80 °C / 427 °C
Expansion	: 30mm / 60 mm / 90 mm / 120 mm




Product Code
KM-DB-F



EXTERNALLY PRESSURIZED EARTHQUAKE EXPANSION JOINTS

Body	: Stainless Steel , Carbon Steel
Connection Type	: Floating Flanged
Pressure Class	: 16 Bar / Max. (40 Bar Optional)
Temperature	: -80 °C / 427 °C
Expansion	: Y:±50mm/±100mm/±150mm/±200mm




Product Code
KM-MDB-F



U-FLEX LOOP

Body	: Stainless Steel
Connection Type	: Floating Flanged
Pressure Class	: 16 Bar
Temperature	: -80°C / 427°C
Expansion	: ±50 mm / ±100mm




Product Code
UFLX-F



V-FLEX LOOP

Body	: Stainless Steel
Connection Type	: Floating Flanged
Pressure Class	: 16 Bar
Temperature	: -80°C / 427°C
Expansion	: ±50 mm / ±100mm

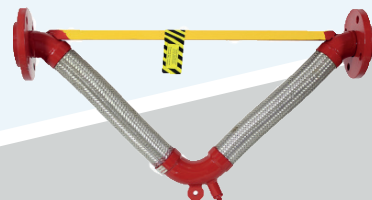

Product Code
VFLX-F





New solutions for HVAC... Problem-free




Vira products provide solutions to the problems.

Vira is a young, dynamic and expert company regarding production of separators, valves and steam related products. To meet our customers needs, we offer customers a combination of our application experience, on going technical support, correct installation and commissioning ability with our high quality products.

Vira provides durable, high-quality valves and steam related products that are used in many kinds of applications, from unique custom jobs to large scale installations.

- Automatic Air Vent
- Solar Automatic Air Vent
- Deaerators
- Dirt Separators
- Hydraulic Balance Tanks
- Butterfly Valves
- Ball Valves
- Check Valves
- Expansion Joints
- Safety Valves
- Actuators
- Steam Separators
- Condensate Pump
- Sample Coolers
- Steam Boiler Automation
- Automatic Blowdown Systems
- Steam Flow Meters
- Steam Traps

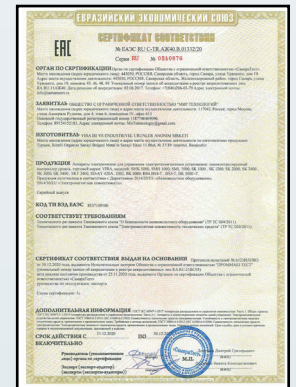

Address: Metal İş San. Sitesi 11.Blok
No: 37/39 İkitelli - İstanbul

E-mail: info@viraisi.com
WebSite: www.viraisi.com

Phone: +90 (212) 549 57 70 (pbx)
Fax: +90 (212) 549 58 48